



# ADZ-15W Standard

Standard Version with Bluetooth function



**15W标准版  
ADZ-BZ15**

4W绿光激光, 波长520nm

4W红光激光, 波长638nm

7W蓝光激光, 波长450nm

光束发散度: <1.2毫弧度 (全角)

调制方式: TTL | 模拟调制

激光寿命: >10,000小时

防护等级: IP25

1.工作环境: 户外及室内, -25°C至40°C

2.扫描系统: 25K振镜, 光学角度±30°

3.控制模式: ILDA, DMX512, 自动, 手动, 主从同步

4.电源: 100-250V, 50/60Hz

5.额定功率: ≤250W

6.尺寸: 245\*330\*190mm (高)

7.重量: 8.1kg

4W green laser, 520nm wavelength

4W red laser, 638nm wavelength

7W blue laser, 450nm wavelength

Beam Divergence: <1.2mrad (full angle)

Modulation: TTL | Analog Modulation

Laser lifespan: >10,000 hours

Protection level: IP25

1. Operating environment: Outdoor and indoor, -25°C to 40°C

2. Scanning system: 25K galvanometers, optical angle ±30°


3. Control mode: ILDA, DMX512, automatic, manual, master-slave synchronization

4. Power supply: 100-250V, 50/60Hz

5. Rated power: ≤250W

6. Dimensions: 245\*330\*190mm (H)

7. Weight: 8.1kg

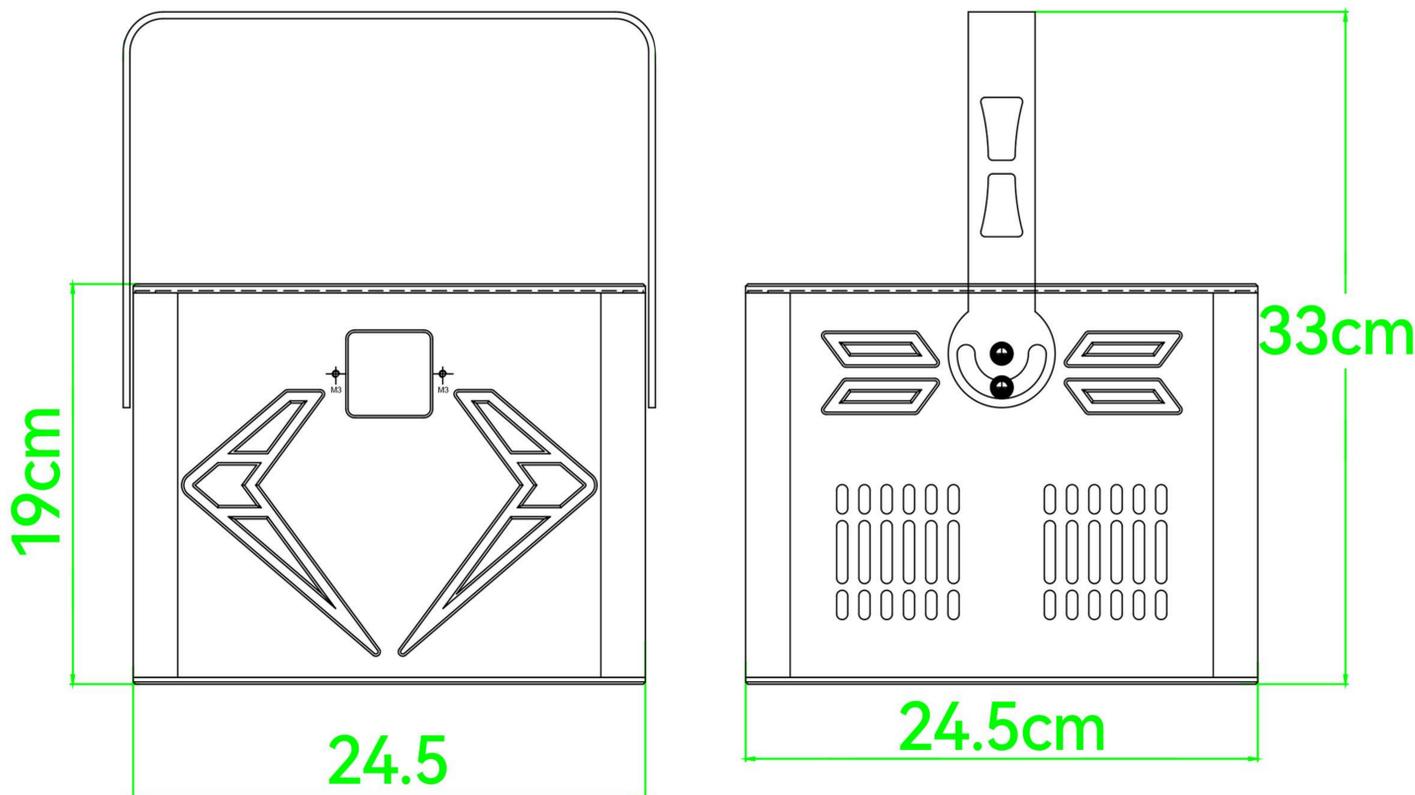



ADZ-BZ15W激光灯应用工程案例





1.电源开关

2.功能菜单控制旋钮

3.ILDA输入

4.ILDA输出

5.电源输入

6.DMX信号输入

7.DMX信号输出

8.RJ44输入/输出

1.Power Switch

2.Function Menu Control Knob

3.ILDA Input

4.ILDA Output

5.Power Input

6.DMX Signal Input

7.DMX Signal Output

8.RJ44 Input/Output